
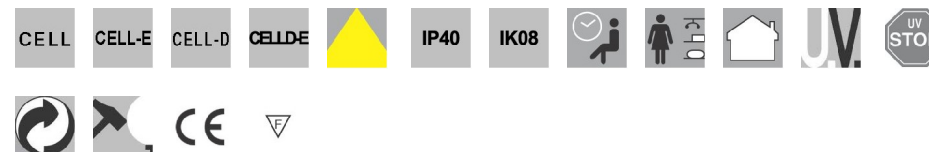


## Bell 1

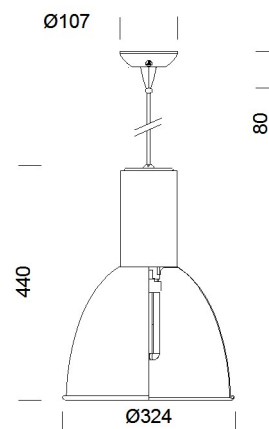

Code	px no. pack.	Gear	Kg	Watt	Base	Colour	Dimensions	Total Installed Power Capacity	Lamps
22221472-00	1	CELL	2.00	FLC 1x26D/E	G24q-3	aluminium	0x0x440 Ø324	27	3000k - 1800lm - Ra 1b
22221474-00	1	CELL	2.00	FLC 1x32T/E	Gx24q-3	aluminium	0x0x440 Ø324	36	3000k - 2400lm - Ra 1b
22221476-00	1	CELL	2.00	FLC 1x42T/E	Gx24q-4	aluminium	0x0x440 Ø324	46	3000k - 3200lm - Ra 1b
22221472-09	1	CELL-E		FLC-D/E1x26	G24q-3	aluminium	0x0x440 Ø324	28	
22221474-09	1	CELL-E		FLC-T/E1x32	Gx24q-3	aluminium	0x0x440 Ø324	38	
22221476-09	1	CELL-E		FLC-T/E1x42	Gx24q-4	aluminium	0x0x440 Ø324	48	
22221472-12	1	CELL-D		FLC-D/E1x26	G24q-3	aluminium	0x0x440 Ø324	29	
22221474-12	1	CELL-E		FLC-T/E1x32	Gx24q-3	aluminium	0x0x440 Ø324	38	
22221476-12	1	CELL-E		FLC-T/E1x42	Gx24q-4	aluminium	0x0x440 Ø324	46	
22221472-94	1	CELLD-E		FLC-D/E1x26	G24q-3	aluminium	0x0x440 Ø324	29	
22221474-94	1	CELLD-E		FLC-T/E	Gx24q-3	aluminium	0x0x440 Ø324	38	
22221476-94	1	CELLD-E		FLC-T/E1x42	Gx24q-4	aluminium	0x0x440 Ø324	48	

Housing: Die-cast aluminium with cooling fins.



Diffuser: Turned anodised and polished aluminium.

Coating: Fluid-coated with a humidity resistant, UV-stabilised acrylic-resin paint.

Lampholder: Ceramic with silver-plated contacts, or polycarbonate with phosphorous bronze contacts.

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

## Bell 2

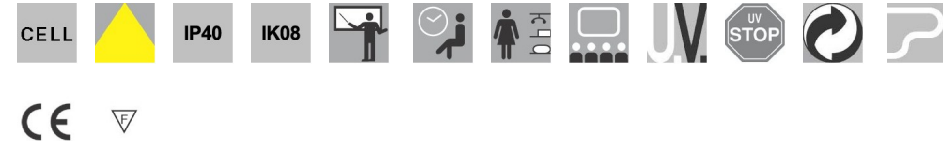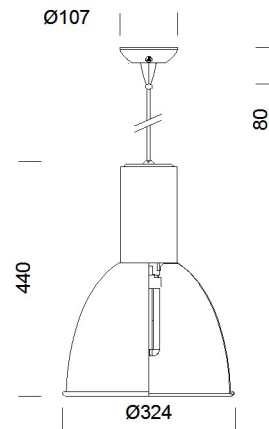

Code	px no. pack.	Gear	Version	Kg	Watt	Base	Colour	Dimensions	Total Installed Power Capacity	Lamps
22221571-00	1	CELL	EL	2.00	BRITESPOT 35	G10	aluminium	0x0x4401 Ø324	78	3000k - 3269lm - 90

Housing: Die-cast aluminium with cooling fins.



Diffuser: Turned anodised and polished aluminium.

Coating: Fluid-coated with a humidity resistant, UV-stabilised acrylic-resin paint.

Lampholder: Ceramic with silver-plated contacts, or polycarbonate with phosphorous bronze contacts.

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

## Bell 3

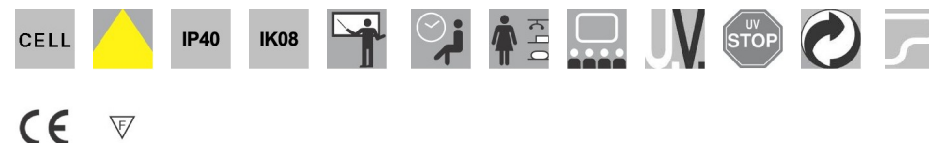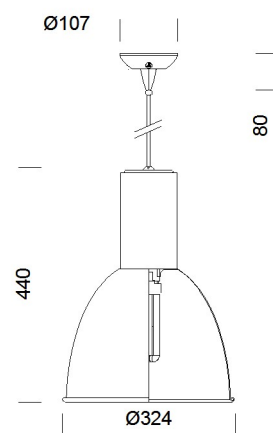

Code	px no. pack.	Gear	Kg	Watt	Base	Colour	Dimensions	Total Installed Power Capacity	Lamps
22221572-00	1	CELL	2.00	CMH-E 70	E27	aluminium	0x0x440 Ø324	78	4100k - 5100lm - Ra 2a
22221573-00	1	CELL	2.00	CDM-R111 70	Gx8.5	aluminium	0x0x440 Ø324	78	

Housing: Die-cast aluminium with cooling fins.


Diffuser: Turned anodised and polished aluminium.

Coating: Fluid-coated with a humidity resistant, UV-stabilised acrylic-resin paint.

Lampholder: Ceramic with silver-plated contacts, or polycarbonate with phosphorous bronze contacts.

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

## Bell 1C

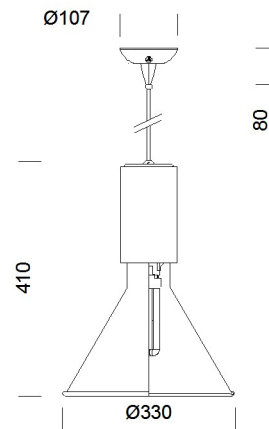

Code	px no. pack.	Gear	Kg	Watt	Base	Colour	Dimensions	Total Installed Power Capacity	Lamps
22221674-00	1	CELL	2.00	FLC 1x32T/E	G24q-3	aluminium	0x0x410 Ø330	36	3000k - 2400lm - Ra 1b
22221676-00	1	CELL	2.00	FLC 1x42T/E	G24q-4	aluminium	0x0x410 Ø330	46	3000k - 3200lm - Ra 1b

Housing: Die-cast aluminium with cooling fins.



Diffuser: Turned anodised and polished aluminium.

Coating: Fluid-coated with a humidity resistant, UV-stabilised acrylic-resin paint.

Lampholder: Ceramic with silver-plated contacts, or polycarbonate with phosphorous bronze contacts.

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

## Bell 2C

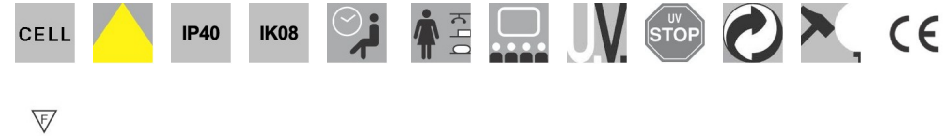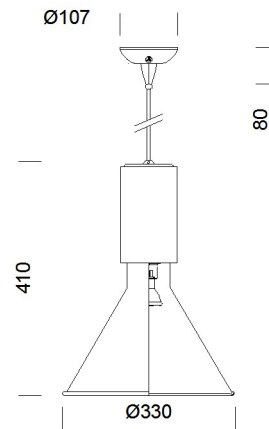

Code	px no. pack.	Gear	Version	Kg	Watt	Base	Colour	Dimensions	Total Installed Power Capacity	Lamps
22221771-00	1	CELL	EL	2.00	BRITESPOT 35	G10	aluminium	0x0x410 Ø330	44	3000k - 3269lm - 90

Housing: Die-cast aluminium with cooling fins.


Diffuser: Turned anodised and polished aluminium.

Coating: Fluid-coated with a humidity resistant, UV-stabilised acrylic-resin paint.

Lampholder: Ceramic with silver-plated contacts, or polycarbonate with phosphorous bronze contacts.

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

## Bell 3C

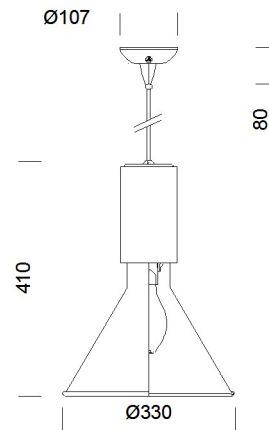

Code	px no. pack.	Gear	Version	Kg	Watt	Base	Colour	Dimensions	Total Installed Power Capacity	Lamps
22221772-00	1	CELL	EL	2.00	JM-E 70	E27	aluminium	0x0x410 Ø330	78	3000k - 5700lm - Ra 1b

Housing: Die-cast aluminium with cooling fins.


Diffuser: Turned anodised and polished aluminium.

Coating: Fluid-coated with a humidity resistant, UV-stabilised acrylic-resin paint.

Lampholder: Ceramic with silver-plated contacts, or polycarbonate with phosphorous bronze contacts.

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

## Bell 4

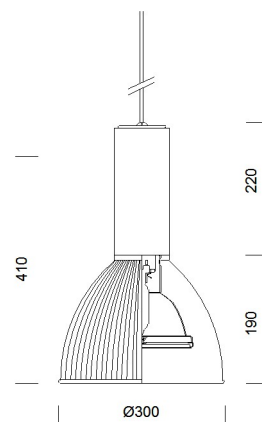

Code	px no. pack.	Gear	Kg	Watt	Base	Beam spread	Colour	Dimensions	Lamps	Total Installed Power Capacity
22221873-00	1	CELL	2.00	SDW-T100	GX12	L	aluminium	0x0x410 Ø300	2550k - 4900lm - 83	108
22221874-00	1	CELL	2.00	FLC 1x42T/E	GX24q-4	L	aluminium	0x0x410 Ø300	3000k - 3200lm - Ra 1b	46
22221875-00	1	CELL	2.00	CDM-T 35W	G12	L	aluminium	0x0x410 Ø300	3000k - 3300lm - Ra 1b	39
22221876-00	1	CELL	2.00	CDM-T 70W	G12	L	aluminium	0x0x410 Ø300	3000k - 6700lm - Ra 1b	78

Housing: Die-cast aluminium with cooling fins.

Coating: Fluid-coated with a humidity resistant, UV-stabilised acrylic-resin paint.

Lampholder: Ceramic with silver-plated contacts, or polycarbonate with phosphorous bronze contacts.

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.